



CORPORATE LICENSE NO.: C-2409



Bryton Corporate
Center Dr
Huntersville, NC

FOR CONSTRUCTION

CANOPY AND
BUILDING LIGHTING
SPECIFICATION

DATE 06.12.17
PROJECT NO 16008



THIS DRAWING IS THE PROPERTY OF ADW ARCHITECTS, P.A. AND SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART. IT SHALL NOT BE USED ON ANY OTHER PROJECT OR GIVEN TO ANY OTHER COMPANY OR AGENCY WITHOUT THE CONSENT OF ADW ARCHITECTS, P.A.



06/12/17


ES2

SHEET NUMBER




FEATURES

- **ChromaSure:** Color consistency resulting in a 2-step MacAdam ellipse across the entire ID+ product line.
- **Field adjustability** of ceiling thickness from 0.5" - 2.5".
- **50° cutoff** to light source and its image.
- **Selection of dimming drivers** available.
- **Right Light:** Standard delivered lumen outputs 500, 1000 and 1500.

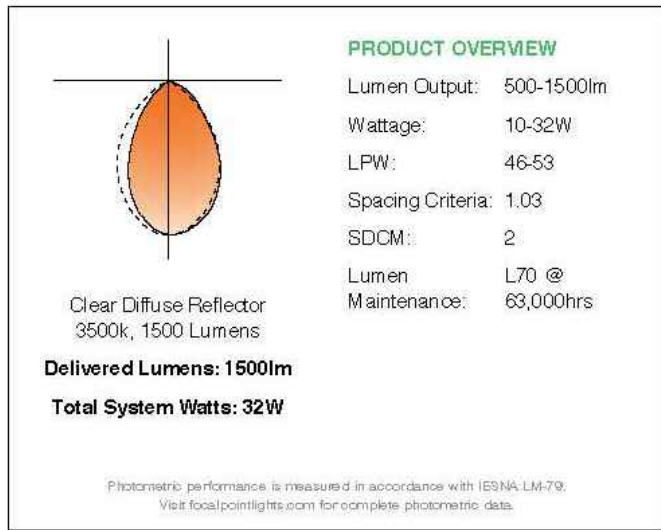

February 2017 •

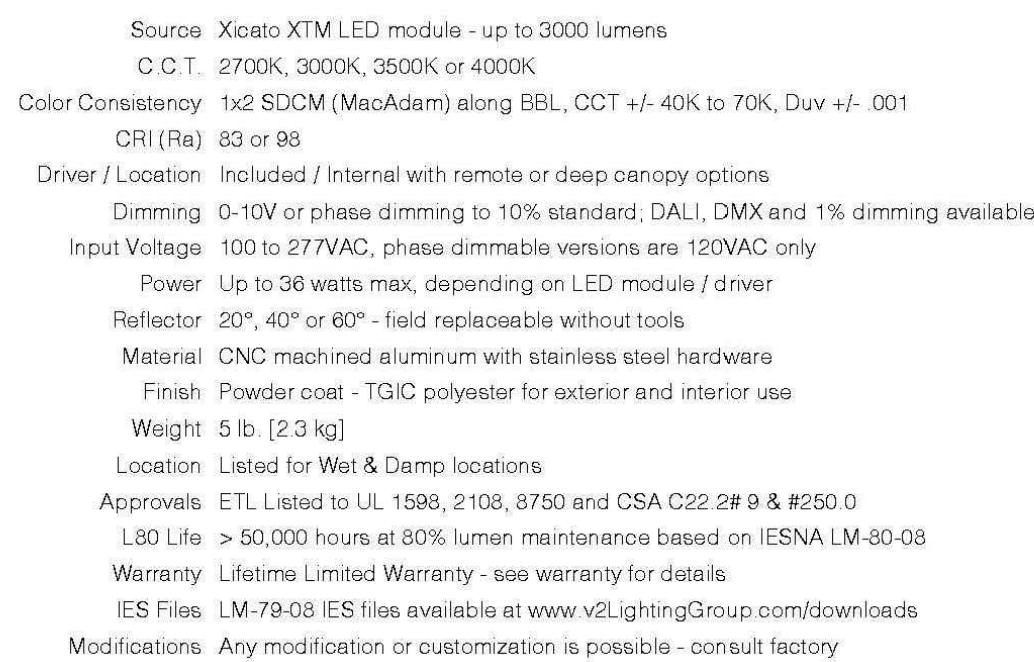

ORDERING LOGIC

Model	Driver Location	Dimming	Mounting Location	Output	CRI *	C.C.T.	Reflector	Shell Color	Options
CILS									
N-Infrared	N-None	D-Diamp	70-7000 Im	83-83	27-2700K	20-20°	XX		
R-Remote	P-Pulse	W-Wiret	10-850 Im	90-90	30-3000K	40-40°	(see chart on page 4)		
D-Deep	V-0-10V		15-1500 Im			60-60°			
C-Canopy	Z-Other		20-2000 Im		40-4000K		ZZ-Custom		
			30-3000 Im						

* 90 CRI not available in 3000 Im

Example Part Number: **C3LS-HND-20932740-93**
CORE 200 LX Science - Internal Drive, No Drimming, Damp Lock on - 2000 Im, 83 CFI, 2700K, 40" Reflector - 93 Red Shell

rev 151207 ©2015 v2 Lighting Group, Inc. Specifications subject to change without notice.

v2LightingGroup.com

1